

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-217206

(43)Date of publication of application : 10.08.2001

(51)Int.Cl.

H01L 21/285  
 C23C 16/34  
 C23C 16/44  
 H01L 21/203  
 H01L 27/04  
 H01L 21/822  
 H01L 27/105  
 H01L 27/108  
 H01L 21/8242

(21)Application number : 2000-371636

(71)Applicant : SAMSUNG ELECTRONICS CO LTD

(22)Date of filing : 06.12.2000

(72)Inventor : KYO SHOHAN  
 RIN GENSHAKU  
 CHAE YUN-SOOK  
 ZEN RINSO  
 SAI KICHIGEN

(30)Priority

Priority number : 1999 9955835  
 2000 200006251

Priority date : 08.12.1999  
 10.02.2000


Priority country : KR  
 KR

(54) METHOD OF FORMING METALLIC LAYER UTILIZING ATOMIC LAYER VAPOR DEPOSITION METHOD AND SEMICONDUCTOR ELEMENT USING THE SAME

(57)Abstract:

**PROBLEM TO BE SOLVED:** To provide a metallic layer forming method by which superior step coverage can be obtained by utilizing an atomic layer vapor deposition method, a desired resistance and electrical conductivity can be decided easily, and then, the diffusion of oxygen can be prevented, and to provide a semiconductor element equipped with a metallic layer formed by the method as a barrier metal layer or the lower or upper electrode of a capacitor.

**SOLUTION:** In this metallic layer forming method, atomic layers are alternately laminated upon another by alternately injecting source gases of a reactive metal A, nitrogen N, and an element B for amorphous coupling of the metal A with nitrogen N into a chamber by the atomic layer vapor deposition method. The semiconductor element is provided with a metallic layer formed by this method as a barrier metal layer, lower electrode, or upper electrode.

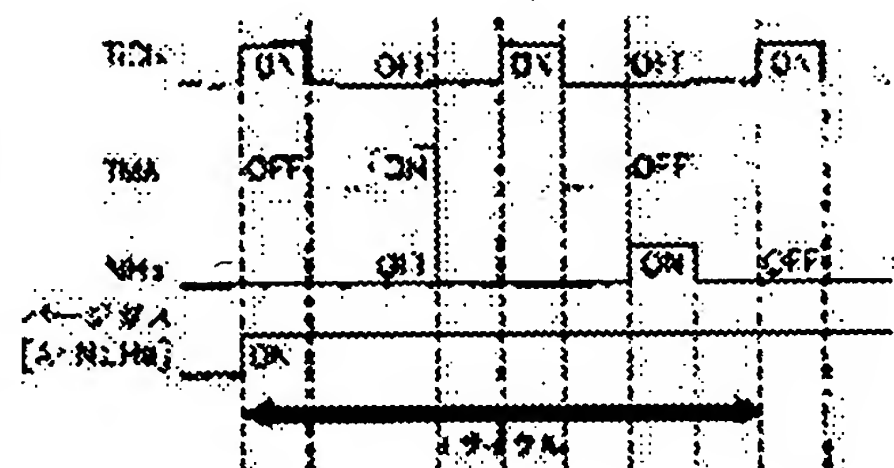

LEGAL STATUS